

Article type : Research Article

Date Received : 05/10/2020

Date Accepted : 26/10/2020

Date published : 01/12/2020



: [www.minarjournal.com](http://www.minarjournal.com)

<http://dx.doi.org/10.47832/2717-8234.4-2.6>



---

## DETECTION AGRICULTURE DEGRADATION FOR THE SOUTH OF BAGHDAD CITY USING REMOTE SENSING DATA FOR YEARS 2010-2019

Taif Adil DHAMIN <sup>1</sup>, Ebtessam F. KHANJER <sup>2</sup>, Fouad K. MASHEE <sup>3</sup>

---

### Abstract

---

Recently, the develop of the science of remote sensing enabled humanity to achieve the accuracy and wide coverage for different natural phenomena, disasters and applications (such as desertification, rainstorms, floods, fires, sweeping torrents, urban planning, and even in military). The main aim of this study is monitoring, highlighting and assessing maps for the degradation of agriculture in the south areas of Baghdad governorate (Al-Rasheed, Al-Yusufiyah, Al-Mahmudiyah, Al-Latifiyah, and Al-Madaen). Based to several factors, including the economic, social and military operations, the area had suffer the lands degradation which led to agriculture retreating. Remote sensing and Geographic information system (GIS) was applied, using ArcGIS 10.4.1 to process, manage, and analysis datasets, beside field verification to estimate the severity assessment of a computerized land degradation. Two satellites were adapted Landsat5 TM+ and Landsat8 OLI/TIRS imageries to assess the extent of land degradation for the study area during the years (5th May 2010 and 2nd May 2019). Two indices used in this research are: The Normalized Difference Vegetation Index "NDVI", and The Normalized Differential Water Index "NDWI". The results showed that there is a clear spatial reduction in both NDVI and NDWI, where the NDVI reduced from 2461082400 m<sup>2</sup> to 1552698000 m<sup>2</sup>, accounting for 89.67 and 56.57 percent, respectively, while the NDWI reduced from 14166000 m<sup>2</sup> to 12053700 m<sup>2</sup>, accounting for 0.52, and 0.44 percent, respectively.

---

<sup>1</sup> Baghdad University, Iraq, [taifadil90@gmail.com](mailto:taifadil90@gmail.com), <https://orcid.org/0000-0002-9757-710X>

<sup>2</sup> Baghdad University, Iraq, [dr.efk33@yahoo.com](mailto:dr.efk33@yahoo.com)

<sup>3</sup> Baghdad University, Iraq, [Phdfouad59@gmail.com](mailto:Phdfouad59@gmail.com), <https://orcid.org/0000-0002-0519-7346>

This article has been scanned by iThenticat No plagiarism detected

Copyright © Published by Minar Journal, [www.minarjournal.com](http://www.minarjournal.com)

Rimar Academy, Fatih, Istanbul, 34093 Turkey

All rights reserved

**Keywords:** Agriculture Degradation, RS and GIS Techniques, Landsat Satellite Imagery, NDVI And NDWI.

## 1. Introduction

Lands of Iraq, inclusive Baghdad areas are actual fertile lands, favorable for agriculture production that can mainly contribute to enriching the national wealth. As the world clearly and rapidly witnesses changes in the climate today as a result of many factors, including human activities of the human being, represented by the industries development and the resulting industrial waste such as acidic fumes and gases which led to excessive oxygen consumption, that led to the expansion of the ozone layer opening, which exposed the Land Cover (LC) to abnormal stresses [1,2], these changes led to widening the phenomenon of deterioration in green spaces (forests, land covered with weeds and farms), desertification, and little water (rain) [2].

As a result, land degradation is consider one of the most serious problems in the world, where defined as stated in the United Nations Convention to Combat Desertification (UNCCD-1997) as the decreasing or loss of land productivity and the loss of its biological diversity, temporarily or permanently, caused by the natural factors or processes resulting from human activities, includes all types of lands, whether they are agricultural lands, pastures or forests [3].

As it requires two interrelated, complex systems: the natural climate system, including (temperature, rainfall, humidity, wind) and the human social system, causes of land degradation are not only biophysical, but also socio- economic (marketing, income, human health, institutional support, poverty), undermining food production and political stability [4].

The land degradation primary driving factors for are associated with climate variability and anthropogenic factors, Which can be attributed, Extended droughts, caused by shifts in precipitation and increased temperature, influence the distribution of vegetation and constitute the main driver for initiating and exacerbating desertification [5].

Soil erosion caused by water and/or wind and the deterioration of the chemical, physical, and biological properties of the soil [6,7].

Poor use of land practices and human activities such as unsustainable agricultural practices, deforestation, and overgrazing and military operations [8].

Remote sensing has long been recommended for its potential role to detect, map and monitor degradation problems with spatial and spectral resolution and for the detection of degraded areas including their spread effects with time [9,10].

With the aggravation of these problems in the modern era, there have been many scientific studies of land degradation cases, using the techniques of remote sensing (RS) and geographic information (GIS) systems [11], for its highly advantages effective technology in agricultural studies, in its various fields, where it has become possible to monitor the changes that occur, observe the manifestations of degradation processes [12], locating and define their areas within the visible and infrared spectrum bands [13], and build an integrated geographic database, using applications and software Geographic information systems for preparing digital maps, all of that lead to the ease handling, measuring, managing, and analyzing them [14], and ensuring easy storage and the possibility of viewing it from several different angles in a short time [15].

### 1- Research Propos

Detecting the processes of agricultural degradation and investigating the extent and magnitude of the deterioration in selected areas in the southern parts of Baghdad for a period from 2010-2019 while identifying the causes of agricultural deterioration

### 2- Study Area

Baghdad province of the capital of Iraq, it is located almost in the middle with latitude and longitude of ( 33.452°N → 33.184°N and 44.189°E → 44.576°E) degree minute of the globe coordinate system. It ranks the first in Iraq's, the population of Baghdad is approximately 7,500,140 [16], extended over an area of approximately 205,100 m<sup>2</sup>, includes 14 administrative units, eight in Rusafa (east of the Tigris River) and six in Karkh (west of the Tigris River). The study area extends between at Universal Transverse Mercator (UTM) of the planet state metric in coordinate system at the top left corner is (406523.257 3677854.421 m) and down right corner is (498088.487 3630828.327 m) [17], as shown in Fig. 1.

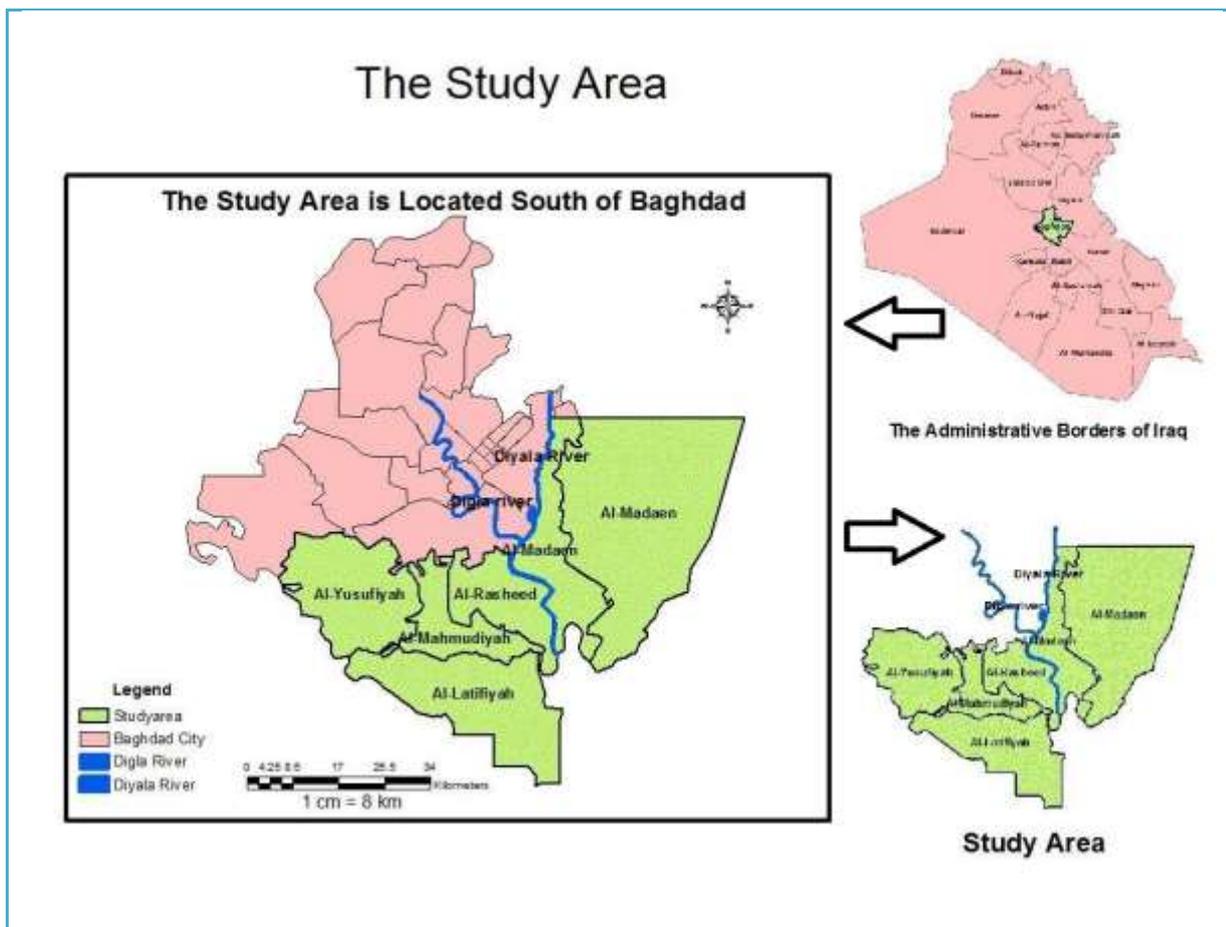


Fig. 1. Illustration the administrative borders of the study area, which are located south of the Iraqi capital, Baghdad, which are, (Al-Rasheed, Al-Yusufiyah, Al-Mahmudiyah, Al-Latifiyah, and Al-Madaen) counties.

### 3- Data Acquisition

The study area scenes from the LANDSAT 5 Thematic Mapper (TM) sensor, and Landsat 8 OLI / TIRS sensor satellites were used at various times, on May 5, 2010, and May 2, 2019, from the United States Geological Situation (USGS) agency [18], see table 1.

Table 1. Landsat Satellite Sensor Information

| Satellite | Date of Launch | Date of Decommission | Sensors  |
|-----------|----------------|----------------------|----------|
| Landsat-5 | 1984/3/1       | Service              | MSS/TM   |
| Landsat-8 | 2013/2/11      | 2013/6/5             | OLI/TIRS |

Table 2. Band ratio process for the appropriate view for the purpose of visual interpretation used in the classification technique

| Landsat 5 (TM sensor) | Wavelength (µm) | Resolution (m) |
|-----------------------|-----------------|----------------|
| Band 7                | 2.08 - 2.35     | 30             |
| Band 4                | 0.76 - 0.90     | 30             |
| Band 2                | 0.52 - 0.60     | 30             |

| Landsat 8 (OLI and TIRS sensor) | Wavelength ( $\mu\text{m}$ ) | Resolution (m) |
|---------------------------------|------------------------------|----------------|
| Band 7                          | 2.11-2.29                    | 30             |
| Band 5                          | 0.77-0.90                    | 30             |
| Band 3                          | 0.53-0.59                    | 30             |

While examining and loading the images they must contain the lowest possible noise in the scene such as (clouds, , water vapor, aerosols weather changes and thick smoke) [19].

#### 4- Methodology:

The research methodology included three basic stages, which are:

4.1. Pre-processing of images: The pre-processing for the dataset included image registration and rectification of TM+ imageries and OLI/TIRS imageries, were based on control points collected from vector files of the e study area, dated on 5th May 2010, and Landsat8 OLI/TIRS in 2nd May 2019.

4.2. Post-processing of images: Two interaction goals followed in this study. In the first stage, remote-sensing techniques are used in evaluation of surface changes and determination of the type of land use classes. In the next stage, the area is evaluated for climate and environmental change by using a prominent land degradation indicator method and GIS tools and then to analyses the impacts of land use/cover class expansion on agriculture degradation. The geometrically rectified and radio-metrically calibrated, TM+ bands 2, 3, 4, 5, and 7 were used to derive the studied indices. Satellite-derived index images were produced to portray surface changes.

#### 4.3. Classification:

Classification technology uses two types:

4.3.1. Supervised Classification: This type of classification develops spectral signatures from locations that have been defined by the user. One method is through designating a pixel (the smallest element in the satellite image and is calculated by the neighboring totals at least 2 adjacent pixels and above). Theoretically, this method is the best classifier [20].

4.3.2. Unsupervised Classification: This classification type categorizes pixels into a pre specified number of statistical clusters. Usually, it is done when little knowledge of the study area is possessed [20].

#### 5- Discussions:

The Supervised Classification Results:

As shown in Figure (2) and table (3) the statistical analysis for supervised classification technique for the study area , the total area of the arable land is (906733800 m<sup>2</sup> ) and the percentage is 33.04% of the total survey area of (2744541900 m<sup>2</sup>) for the fifth month of the year (2010), but for the fifth month of year (2019) the ratio was 24.84% and the area extracted (681684300 m<sup>2</sup> ) and this means an decrease in the green area.

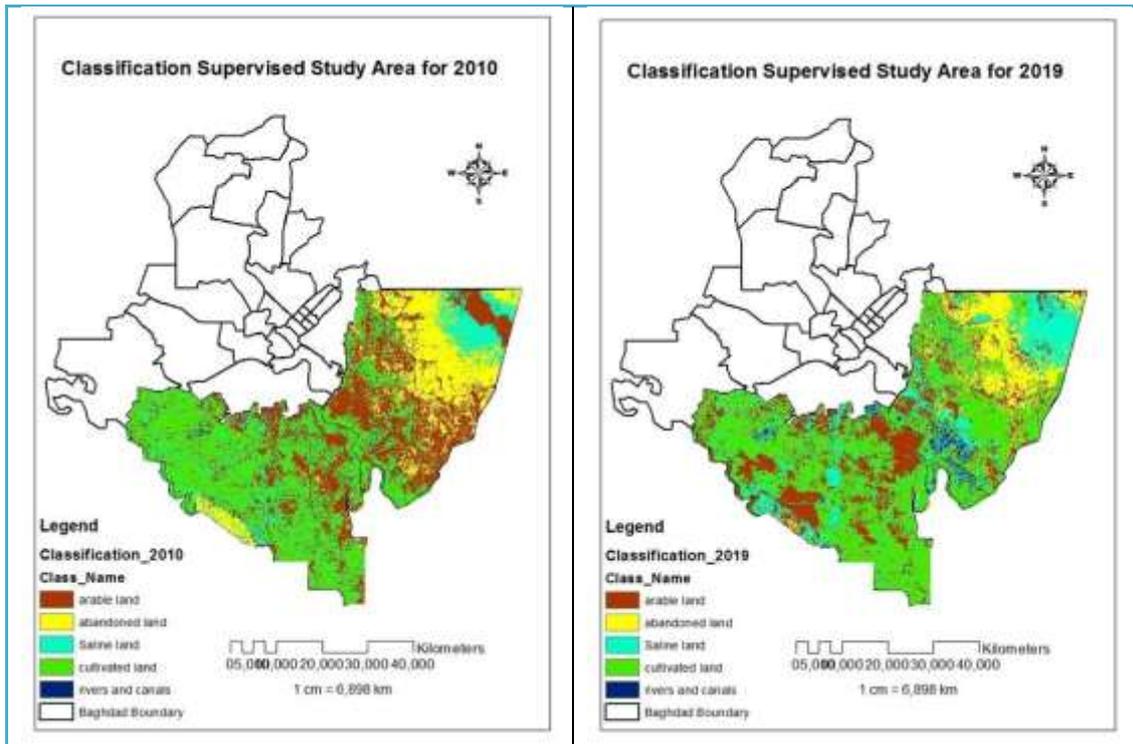


Fig. 2. Supervised Classification of composite (visible images) for 2010 and 2019 years periodic respectively. The statistic was calculated for the features (Arable, Abandoned, Saline, Cultivated and Rivers and canals Types)

Table 3. Calculating statistical pixel content each features classification.

| Supervised Classification |                   |            |       |               |            |       |               |
|---------------------------|-------------------|------------|-------|---------------|------------|-------|---------------|
| No                        | Class             | 2010\5\5   |       |               | 2019\5\2   |       |               |
|                           |                   | Area m2    | %Area | Sum of Pixels | Area m2    | %Area | Sum of Pixels |
| 1                         | Arable land       | 906733800  | 33.04 | 1007482       | 681684300  | 24.84 | 757427        |
| 2                         | Abandoned land    | 466678800  | 17.00 | 518532        | 313468200  | 11.42 | 348298        |
| 3                         | Saline land       | 393303600  | 14.33 | 437004        | 545274900  | 19.87 | 605861        |
| 4                         | Cultivated land   | 952685100  | 34.71 | 1058539       | 1134562500 | 41.34 | 1260625       |
| 5                         | Rivers and canals | 25140600   | 0.92  | 27934         | 69552000   | 2.53  | 77280         |
| Total                     |                   | 2744541900 | %100  | 3049491       | 2744541900 | %100  | 3049491       |

The total area of the abandoned land is (466678800 m<sup>2</sup>) and the percentage is 17.00% of the total area of the year (2010), but in 2019 the ratio was 11.42% and the area extracted (313468200 m<sup>2</sup>) and this means a decrease in the area.

The total area of the saline land is (393303600 m<sup>2</sup>) and the percentage is 14.33% of the total area of the year (2010), but in (2019) the ratio was 19.87% and the area extracted (545274900 m<sup>2</sup>) and this means an increase in the area with saline lands.

The total area of the cultivated land is (952685100 m<sup>2</sup>) and the percentage is 34.71% of the total area of the year (2010), but in (2019) the ratio was 41.34% and the area extracted (1134562500 m<sup>2</sup>) and this means an increase in the green area.

The total area of the rivers and canals is (25140600 m<sup>2</sup>) and the percentage is 0.92% for the fifth month of the year (2010), but in (2019) the proportion was 2.53% and the extracted area was (69552000 m<sup>2</sup>), and this means there is an increase in water, shown in figure (3).

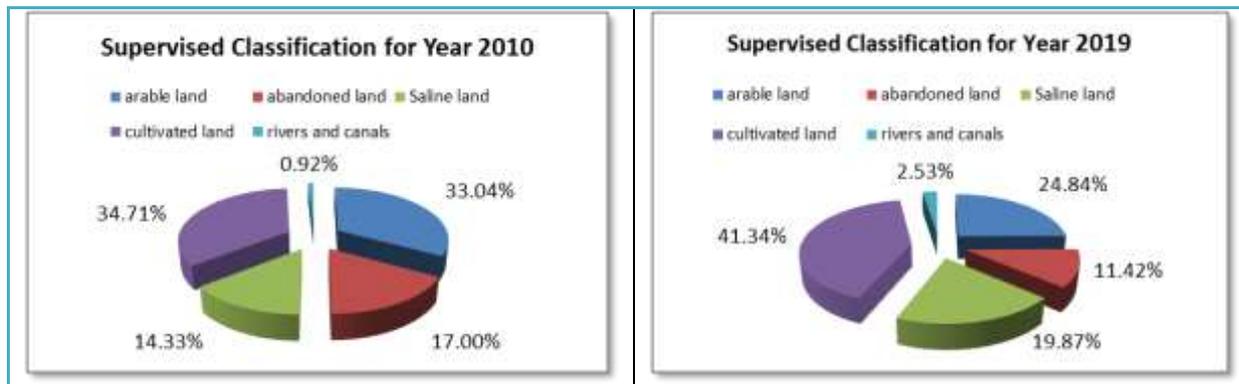


Fig. 3. Chart of Supervised Classification techniques for years 2010-2019. The two indices covered in this study were tested for vegetation changes; Normalized Difference Vegetation Index (NDVI), Normalized Difference Water Index (NDWI), were calculated on basis of the following equations, respectively:

• **Normalized Difference Vegetation Index (NDVI)**

The NDVI is a calculation used to identify vegetation and its health through the levels of chlorophyll detected in the leaves. It has been widely used for remote sensing of vegetation, uses radiances or reflectance from a red channel around ( 0.66 μm ) and a near-IR channel around ( 0.86 μm ) . The red channel is located in the strong chlorophyll absorption region, while the near-IR channel is located in the high reflectance plateau of vegetation [21].

NDVI is calculated from the visible and near-infrared light reflected by vegetation [22].

To apply the NDVI the following formula is used [23];

$$NDVI = (NIR - R_{Visible}) / (NIR + R_{Visible}) \dots\dots\dots (1).$$

Where:

NDVI, Normalized difference vegetation index

NIR, Near Infra-Red channel and R: Red band visible

• **NDVI Normalized Difference Water Index (NDWI)**

The water index is usually calculated in order to monitor the water condition in the study site, it is a satellite-derived index from the Near-Infrared (NIR) and Short Wave Infrared (SWIR) channels. The SWIR reflectance reflects changes in both the vegetation water content and the spongy mesophyll structure in vegetation canopies, while the NIR reflectance is affected by leaf internal structure and leaf dry matter content but not by the water content. The combination of the NIR with the SWIR removes variations induced by leaf internal structure and leaf dry matter content, improves the accuracy in retrieving the vegetation water content. The amount of water available in the internal leaf structure largely controls the spectral reflectance in the SWIR interval of the electromagnetic spectrum. SWIR reflectance is therefore negatively related to leaf water content [24].

The change in land cover is estimated using the water standard difference indicator NDWI by the equation:

$$NDWI = (SWIR - NIR) / (SWIR + NIR) \dots\dots\dots (2).$$

Where:

NDWI, Normalized Difference Water Index

NIR, Near Infra-Red Band

SWIR, Short Wave Infrared Band

Both (NDVI) and (NDWI) range between value (+1.0, -1.0)

• **(NDVI) Results and Discussions :**

The statistical analysis of the supervised classification technique for south Baghdad area was illustrated in table 4, and the change was measured using the NDVI indicator. The total area of south Baghdad is

(2744541900 m<sup>2</sup>). From this area, the quantities of the vegetation cover were calculated, and its area (2461082400 m<sup>2</sup>) about 89.67% in 2010. On the other hand in 2019, the area of vegetation cover (1552698000 m<sup>2</sup>) was 56.57%. The area of land without vegetation was also measured in 2010 and it is estimated (283459500 m<sup>2</sup>), 10.33% of the total area. In 2019, the total area without vegetation cover is estimated at (1191843900 m<sup>2</sup>) with a percentage of 43.43%, shown in figure 4 and 5. That is leading to the fact of decreasing in the area of vegetation, which is the highest recorded in the controlled classification process for the study area. This shows that the NDVI process is accurate.

Table 4. Calculating statistical pixel content features classification of Change Vegetation (NDVI).

| Change Vegetation (NDVI) |               |            |       |               |            |       |               |
|--------------------------|---------------|------------|-------|---------------|------------|-------|---------------|
| No                       | Class         | 2010\5\5   |       |               | 2019\5\2   |       |               |
|                          |               | Area m2    | %Area | Sum of Pixels | Area m2    | %Area | Sum of Pixels |
| 1                        | Water Body    | 2461082400 | 89.67 | 2734536       | 1552698000 | 56.57 | 1725220       |
| 2                        | Without Water | 283459500  | 10.33 | 314955        | 1191843900 | 43.43 | 1324271       |
| Total                    |               | 2744541900 | %100  | 3049491       | 2744541900 | %100  | 3049491       |

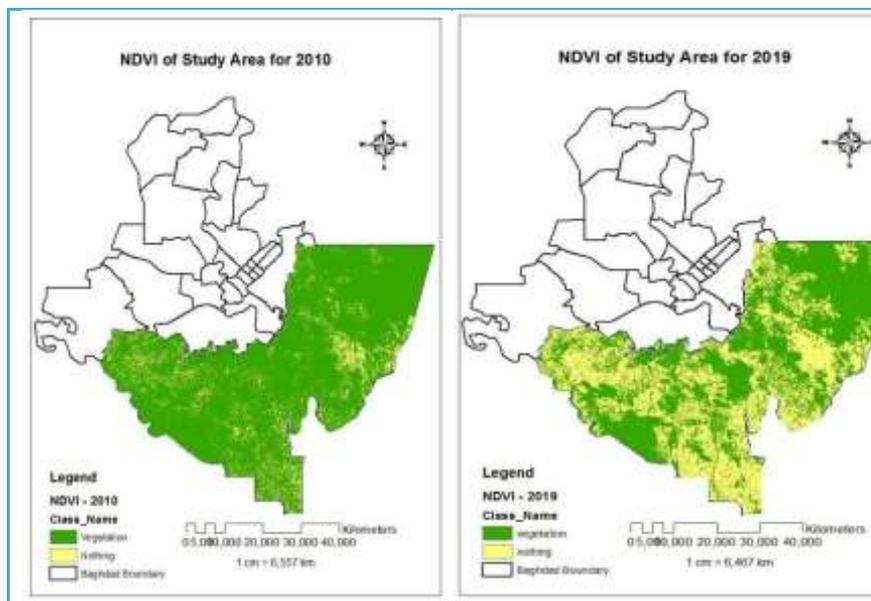


Fig. 4. The Band Ratio process for calculating the Normalized Difference Vegetation Index (NDVI) for the study area for years (2010-2019) respectively.

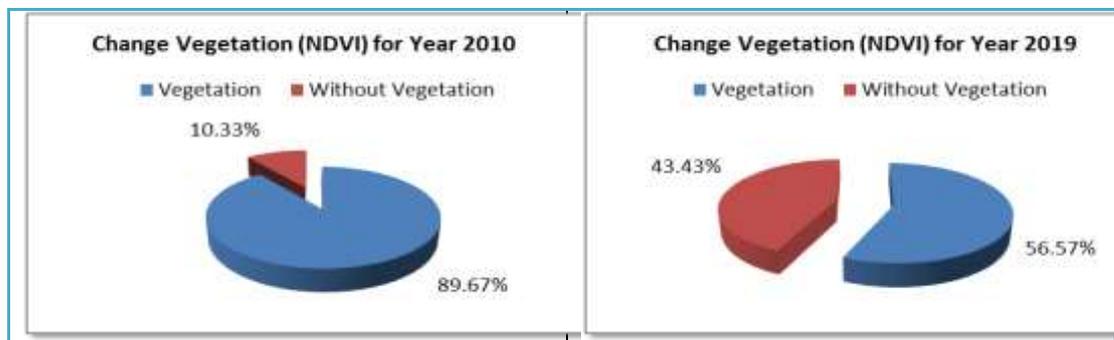


Fig. 5. Chart of Supervised Classification techniques of Change Vegetation (NDVI) for years (2010-2019).

**(NDWI) Results and discussion**

Water content area was illustrated in table 5, where the total area for 2010 is (2744541900 m<sup>2</sup>), which constitutes of 0.52% of water body with area of (14166000 m<sup>2</sup>), and the remaining area without water is (2730375900 m<sup>2</sup>)with 99.48% percentage. The total area of water in 2019 is (2744541900 m<sup>2</sup> ), which constitutes 0.44% of water body with area of (12053700 m<sup>2</sup>), and the remaining area without water is (2732488200 m<sup>2</sup>) with a percentage of 99.56%. We conclude that the quantities of water in south Baghdad during 2010 were more than 2019, and this indicates that the rainy season was better. The decreasing in water will affect the spread of natural vegetation and the result of human activity, as shown in figure 6 and 7.

Table (5): Calculating statistical pixel content each features classification of Change Water Body (NDWI)

| Change Water (NDWI) |               |            |       |               |            |       |               |
|---------------------|---------------|------------|-------|---------------|------------|-------|---------------|
|                     |               | 2010\5\25  |       |               | 2019\5\2   |       |               |
| No                  | Class         | Area m2    | %Area | Sum of Pixels | Area m2    | %Area | Sum of Pixels |
| 1                   | Water Body    | 14166000   | 0.52  | 15740         | 12053700   | 0.44  | 13393         |
| 2                   | Without Water | 2730375900 | 99.48 | 3033751       | 2732488200 | 99.56 | 3036098       |
| Total               |               | 2744541900 | %100  | 3049491       | 2744541900 | %100  | 3049491       |

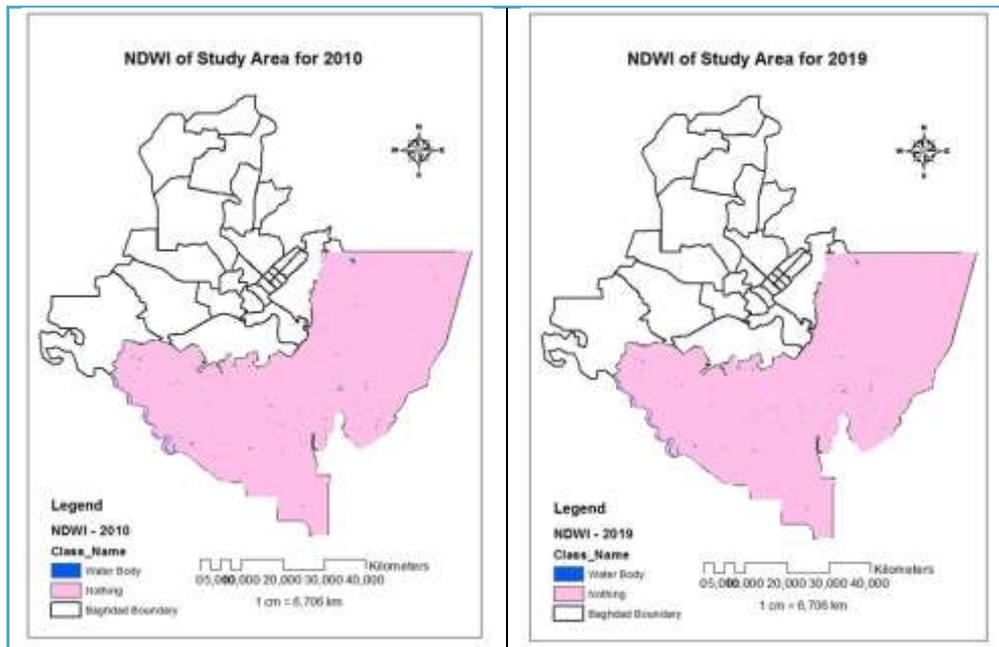


Fig. 6. The Band Ratio process for calculating the Normalized Difference Water Index (NDWI) for the study area for years (2010-2019) respectively.

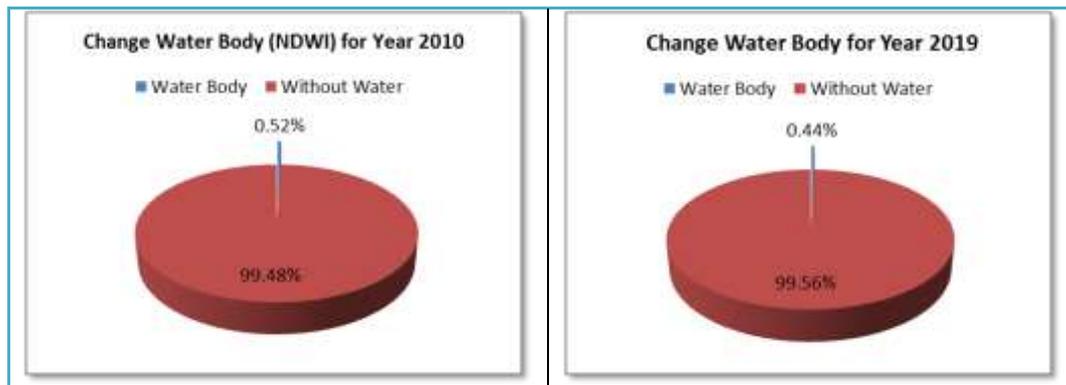


Fig. 7. Chart of Supervised Classification techniques of Water Body (NDWI) for years (2010-2019)

## 6. Conclusions

The study highlighted that land use dynamics is a useful indicator for areas threatened by agriculture degradation, which is closely related to anthropic activities, where increasing land degradation lead to the acceleration of the land surface sensitivity, which has negatively serious impact on the agriculture ,environment and public health.

1. The study showed that the processes of land degradation that were rich in agriculture contributed to the gradual loss of vegetation cover, due to wars and military operations, which led to the displacement of the labor force in agriculture, plowing, random watering, urban encroachment and excessive exploitation of available resources without the introduction of engineering and agricultural mechanization.
2. Overall results of the study indicated a general vegetation deterioration of 33.1 %.
3. The findings of this study showed a decrease of arable land with 8.2%, a decrease of abandoned land with 5.58 %, an increase of saline land with 5.54%, an increase of cultivated land with 6.63%, an increase of rivers and canals areas with 1.61% of the total area.
4. The distribution of (NDVI ) for the period (2010-2019), showed negative pattern of (high vegetation density and moderate vegetation density) and positive pattern of (low vegetation density).
5. Application of (NDWI) during the period (2010-2019), showed a negative change in surface area of the water body of the study area represented by south of Baghdad areas, with area of (14166000 m<sup>2</sup>) with water body in 2010 to (12053700 m<sup>2</sup>) in 2019, while (2730375900 m<sup>2</sup>) in 2010 to (273248820 m<sup>2</sup>) in 2019 without water body.

## References

- Ahmed H Al-Sulttani, Ayad Ali Faris Beg . 2020. Hypsometric Analysis of Al-Adhaim Basin Using a New GIS-Technique. Iraqi Geological Journal. 53(2B): 154-170. DOI: 10.46717/igj.53.2B.8Rs-2020.09.08.
- Al- Ramahi F K M (2020). Spatial Analysis of Radon Gas Concentration Distributed at Baghdad City Using Remote Sensing and Geographic Information System Technique. Iraqi Journal of Agricultural Sciences; 51(Special Issue):21-32.
- Al Ramahi F K M, Mazin S J, Muaid J R. 2020. To study climatic factors effect on Land Covers (LC) for Salah Aldeen region by using remote sensing data. Ecology, Environment and Conservation; 26(1): 446-453.
- Ali K M Ali, Al Ramahi F K M. 2019. A study of the Effect of Urbanization on Annual Evaporation Rates in Baghdad City Using Remote Sensing. Iraqi Journal of Science: 61(8); 2142-2149.
- Ali K. Mohammed Ali, Fouad K. Mashee Al Ramahi. 2020. The Study Air temperature Annual Rates Effect for Urban of Baghdad City by Using Remote Sensing Data Techniques. Engineering and Technology Journal: 38(01); 66-73.
- Application to An Urban Setting, Institute of Environmental Science and Meteorology,
- Fouad K M, Ahmed A Z. Gheidaa S H. 2012. Monitoring Vegetation Growth of Spectrally Landsat Satellite Imagery ETM+ 7 & TM 5 for Western Region of Iraq by Using Remote Sensing Techniques. Iraqi Journal of Science; 53(4):1162-1166.
- Fouad KM, Zina KI. 2017. Estimation of Suaeda aegyptiaca Plant distribution regions at Iraq using RS & GIS Applications. Iraqi Journal of Science 58(2A): 767-777. <https://DOI:10.24996.ijs.2017.58.2A.20>.

- GhalebFaour. 2014. Detection and mapping of long- term land degradation and desertification in Arab region using moderest . National Center for Remote Sensing. National Council for Scientific Research, Beirut, Lebanongfaour@cncs.edu.lb
- Ghazal N K, Shaban A H, Mashi F K. 2012. Change Detection Study Of Al Razaza Lake Region Utilizing Remote Sensing And GIS Technique. Iraqi Journal of Science: 53 (4); 950-957.
- Kossayk. Al-Ahmady, Sarah Dhurgham Al-Jarjees. 2020. The Usage Of GIS forthe Devastated Urban CentersManagement and Preservationof Monuments/Studt Case: Nabi-Jarjis Districtin Mosul Cityin Iraq. Iraqi Geological Journal; 53(1B): 57-69.
- Marion Micah R. Tinio. Supervised and Unsupervised Classification:
- Mashee F K, Abdul-Rahman B A, Mazin S J. 2020. Spatial Monitoring for Degradation Al-Razzaza Lake by Analysis Temporal of Remote Sensing Data Using Geographic Information System Techniques. EurAsian Journal of BioSciences; 14(3): 1623-1632.
- Mashi F K (2018). Monitoring Al-Hammar Marsh Topography and Climatic Applied Satellied MODIS Imagery. Indian Journal of Natural Sciences; 8(47): 13705-13714.
- Mohammed Ali A K, Al-Ramahi F K M, Abdul-Rahman B A. 2019. Evaluation of impact of vegetation decrease on precipitation rates in Baghdad City using remote sensing technique. Eco. Env. & Cons; 25 (November Suppl. Issue): S48-S54.
- Muhsin I J, Faleh H M, Fouad K M. 2012. Multi Spectral Scanner "MSS" and Panchromatic Components Difference of Al- Haditha Dam Region Using GIS and Remote Sensing Techniques. Al-Mustansiriyah J. Sci: 23(6); 233-242.
- Muhsin I J, Mashee F K. 2012. Improving Spatial Resolution Of Satellite Image Using Data Fusion Method. Iraqi Journal of Science: 53(4); 943-949.
- Muthanna M Abd , Fouad K M A, Fadhil M A. 2018. Assessment of Irrigation Water Quality for Dabdaba for Mation by Using GIS Techniques in Karbala Province, Iraq. Indian Journal of Natural Sciences; 9(50): 14677-14684.
- Nawal K. Ghazal and Mustafa J. Shahbaz. 2020. Detection and Interpretation of clouds Types Using Visible and Infrared Satellite Images. Iraqi Journal of Physics. 15(34): 123-137. DOI: 10.13140/RG.2.2.22024.98568.
- Rafid J. Tawfeeq, Israa J. Muhsin, Fouad K. Mashe. 2011. Monitoring the Vegetation and Water Content of AlHammar Marsh Using Remote Sensing Techniques. Baghdad Science Journal; 8(2) : 646-651.
- Sabins F F (1987) Remote sensing: principles and inter-pretation [M].New York: W.H. Freeman
- Saleh M A, Fouad K M. 2013. Monitoring Terrorist Operation on Baghdad Using Spatial Analysis of GIS Applications. IJSR, November 2013; 3(11): 1357-1367.
- Sivakumar M V K, Roy P S, Harmsen K, Saha S K. (2003). Satellite Remote Sensing and GIS Applications in Agriculture Meteorology, Proceedings of the Training Workshop7-11 July, 2003, Dehra Dun, India.
- Sujatha G, Dwivedi R S, Sreenivas K S, Venkaratathan L (2000) Mapping and monitoring of degraded lands in part of Jaunpur district of Uttar Pradesh using temporal spaceborne multispectral data. Int [J]. J. Rem. Sen., 21(3):
- University of the Philippines, Diliman,2013,2.
- WMO. "World meteorological organization-World day to combat desertification, Climate and land degradation". WMO-No. 989. Geneva. Switzerland, 2006, pp. 32.