

ORGANIC SOLAR CELLS: SHORT REVIEW

Fatima H. MALK¹

University of Basrah, Iraq

Alyaa Abdul Hasan ABDUL KAREM

University of Basrah, Iraq

E. H. Al – TEMEME

University of Basrah, Iraq

Abstract

On the earth's surface, the sun is a source of light energy. Electrical energy was produced when solar energy was converted into free energy charged within the particles of some materials. Organic solar cells (OSCs) have gotten a lot of attention because of their advantages like low cost and flexibility. It is semi-transparent, non-toxic, and ideal for mass production. OSCs with high-performance active layer, electrode, and interfacial materials have made significant progress, as have novel device architectures. In particular, active layer material innovation allows for the possibility of achieving high performance in OSC by using absorbent materials; polymers are commonly used as absorbent layers to induce light absorption efficiency and device performance.

Keywords: Organic Solar Cells, Donor Layers, Acceptor Layers, Stability Of Solar Cells.

 <http://dx.doi.org/10.47832/2717-8234.13.16>

¹  fatima.malk@uobasrah.edu.iq, <https://orcid.org/0000-0003-1446-3359>

Introduction

Human existence has always been based on energy. Today, in the twenty-first century, finding renewable and clean energy to replace traditional fossil energy is still critical. Solar energy is the source of all other clean energy, including wind energy, hydropower, and ocean energy. Solar energy has been invested as one of the clean energy sources, with Bell Telephone Laboratories inventing the first silicon solar cell in 1954. The family of solar cells invented in these laboratories includes Si cells, amorphous thin-film devices, and emerging photovoltaic cells (PV) are all cases of emerging technologies (1). Many such inorganic thin-film solar cells have also been commercialized, and the performance of emerging photovoltaic such as OSCs, dye solar cells (DSSCs), perovskite solar cells (PSCs), and others has significantly improved. Organic solar cells (OSC) have gained popularity in recent years as a low-cost, flexible, semi-transparent, non-toxic alternative to other PV technologies that is ideal for large-scale processing. According to the National Renewable Laboratory Energy (National renewable energy laboratory)'s research cell efficiency scheme, PCE in organic solar cells (OSC) has increased rapidly in recent years. Organic solar cells (OSC) made first-generation OSCs with a single active layer sandwiched between two electrodes with working functions, with the latest OSCs yielding a certified PCE of 18.2%. (2), demonstrating their potential for future practical applications. However, due to the complexity of excited states (electron-hole) dissociation and the efficient recombination of electrons and holes, single-layer

devices had a low PCE of less than 0.1%. (3). Organic solar cells (heterocyclic bilayer OSCs (Fig. 1), containing acceptor and donor materials (copper as the donor (D) and polyline tetra carboxylic derivative as acceptor (A)) were created, presented a major breakthrough in the field of organic solar cell fabrication (OSC). Copper-phthalocyanine and tetracarboxylpyrene act as active layers in this hetero structure bilayer device, resulting in a 1% increase in PCE. However, its effectiveness is limited a cinar. To put organic solar cells to use, they must have three layers: a donor layer, a passive layer, and an active layer that stimulates the exciton pair (gap - electron) to work. In 1995, Heeger and his research team invented these links (BHJ), which are depicted in Figure (1) (4, 5). In the field of organic solar cells, there has been remarkable progress. in many time ago, (OSC). Existing research indicates that the efficiency of organic solar cells (OSC) is greater than 10%, if not 20%. (6). This advancement can be attributed to the discovery of new materials with excellent photosensitivity, such as

Poly[2-methoxy-5-(3',7'-dimethyloctyloxy)-1,4-phenylenevinylene and

poly(3-hexylthiophene-2,5-

diyl) as donors and fullerene derivatives were popular acceptors in the early days of the field (7).

Hundreds of more complex donor and acceptor layer materials have been presented that improve photovoltaic properties, have good light absorption, charge generation, and excitonic generation (electron-hole), and significant progress has also been made in other components that do not. Organic solar cells (OSC) are embedded with electrodes and interlayers. Furthermore, Organic solar cells (OSC) with matrix multiplication and tandem structures have gained popularity. (8)

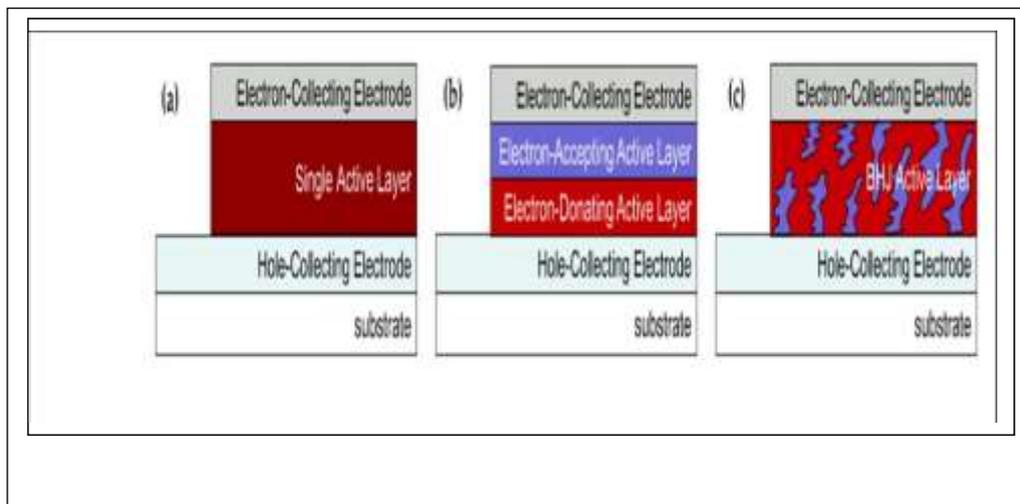


Figure (1) Organic Solar Cell

Organic solar cell advancements

Organic solar cells are classified into three types: organic monocrystalline solar cells, organic bilayer solar cells, and heterogeneous solar cells in bulk figure(2).

Because they are made up of a single layer of organic materials, monolayer organic solar cells (OSCs) are the simplest structure of organic solar cells. It is made up of a conjugated polymer layer sandwiched between two conducting electrodes. The main requirement for device fabrication is an absorbing medium film thickness of 10-20 nm(9). Bilayer organic solar cells (OSC) have two separate organic layers that are confined together. Between the electron and hole assembly layers, conductive electrodes are placed. At the interface between acceptor and donor, device's fundamental structure The separation of excited states occurs. The purpose of modifying electrodes to form better ohmic contacts, with electron and hole collecting layers is to improve electron affinity and ionization potentials. The donor layer absorbs the incoming photon, and electrons in the donor material move from the highest occupied molecular orbital (HOMO) level to the lowest unoccupied molecular orbital (LUMO), forming excitons. At long last Organic solar cells (OSC) are heterogeneous on a photovoltaic (absorbent) layer composed of a polymer mixture. Typically, the mixture is created by combining electron donor and acceptor polymers and then inserting it between electrodes. (10,11).

Organic solar cell stability

Because (OSCs) are highly sophisticated devices, even in the absence of external degradation factors, their stability cannot be controlled. The inherent instability is caused by two factors: active layer morphology changes and carrier diffusion, transport layer, and electrical materials in the active layer. The most important component of heterojunction OSCs (BHJ) solar cells is the active layer, which has a bi-domain nan morphology with doped donor and acceptor material. To achieve the best acceptor and donor mixing performance, the active layer morphology must be optimal. It is achieved by using efficient exciton dissociation and charge carriers. Concurrently, the transfer and recombination processes are sped up. However, the optimum is not always the thermodynamic steady state at equilibrium. As the most effective morphology. (12,13) because of the high mobility of donor and acceptor material and, in some cases, a structural mismatch between donor and acceptor, (14) investigated the role of phase separation from the molecular aggregation point and the aggregation field and found that phase separation had a significant negative impact on the charge generation, transport, and extraction processes in the active layer. They

pointed out that the mixed system can have a high degree of stability due to its perfect mixing, and that the optimal morphology is initially thermodynamically and creates an equilibrium state, just a few examples of donor and acceptor materials, widely used electrodes, aluminum (Al) and indium tin oxide (ITO), Even in the absence of external factors, it can cause diffusion from Al and In atoms to the carrier and active layer. (15,16) extensively use poly(3,4-ethylenedioxythiophene)- poly(styrenesulfonate) as a carrier transport layer), It has the potential to spread in the active layer (17). It is possible to argue that the diffusion of transport layers and carrier electrodes can change the energy levels of each layer and cause traps in the active layer, which accelerates non-radioactive charge recombination. The transport

active layer, as well as electrical materials, Light has the same effect. (photo oxidation) (photo oxidation) The changing composition of both donors and acceptors reduces the photovoltaic properties of organic solar cells (OSCs), resulting in lower light absorption and charge generation (18), Because solar cells require constant illumination, they must operate at a relatively high working temperature with constant heating. Unfortunately, many organic solar cells (OSCs) are thermally unstable. Furthermore, most organic solar cells are susceptible to air instability (OSCs). The ratio of oxygen and water in the surrounding environment may be detrimental to device performance, and the diffusion of oxygen and water around the cells causes

severe physical and chemical damage.

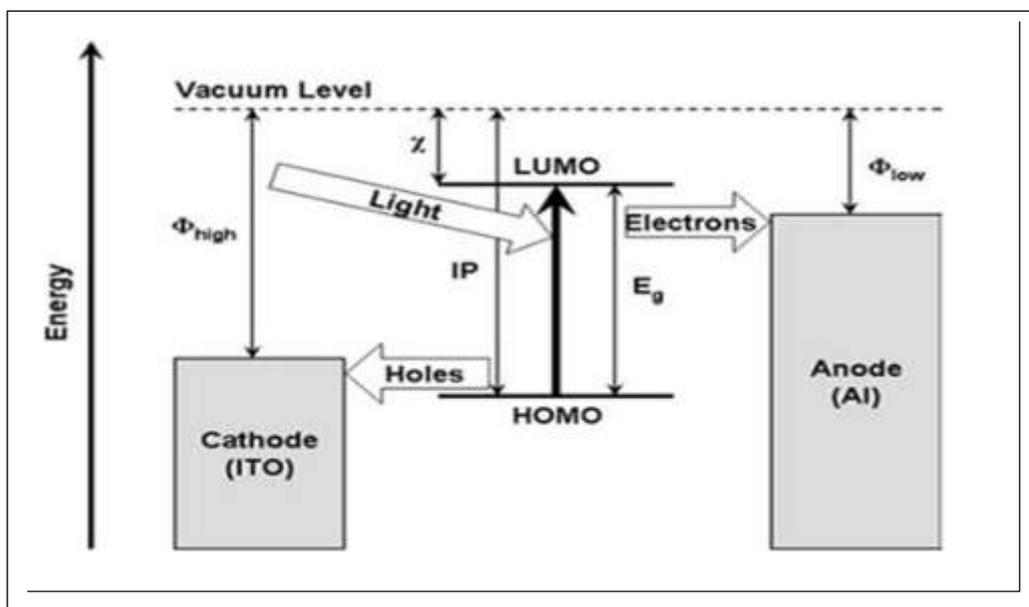


Figure 2: Solar cell mechanics

Organic solar cell material compositions.

Acceptors and donors are the materials used. The donors contain small molecules that are part of the material's structure, such as the polymer molecular structure in polymeric organic solar cells (PSCs). Donors are typically D-A polymers: electron acceptors: electron donor units (20) Figure (3) shows that the donor polymer used in organic solar cells (OSCs), such as PC61BM and PC71BM, has always been in first place due to its isotropic transfer and high electron affinity (21).

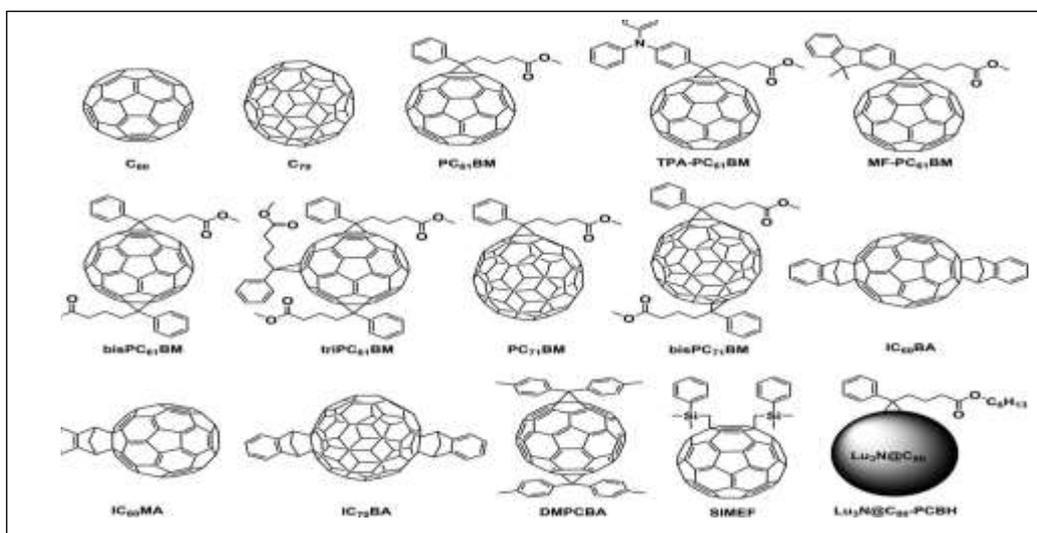


Figure3: Organic solar cell material compositions

Foundation of organic solar cells' operation.

Organic solar cell's operation could be summarized in the following step:-

Absorption of Photons Light, Excitons, and Diffusion Excitons Charge Separations, Pair Accumulation (Electron, Hole) Collection of Charges Because of the molecular structure of the conjugate organic materials (22) used, the excitation process leads to the generation of the pair after the photon absorption of the incident light by the activelayer in the cell structure, (Electron - gap) This causes pair spread in the active layer and electron separation if the electron moves towards the negative pole and the gap moves towards the positive pole, and the separation efficiency of the pairs must be high (23),

Organic solar cell advancements over the last ten years

There is a pressing need for all polymeric organic solar cells (APOSCs) to improve their efficiency.

In 2012, researcher Seong-Kyujang and his colleagues used P3HT:PCBM as an active layer in solar cells in a 50:50 ratio, and the cell efficiency was 2.9%. Deng Zhen and his colleagues investigated the use of PEDOT:PSS in solar cells the same year, and discovered that it had a high efficiency of 3.34% (24). Due to its high conductivity, PEDOT:PSS polymer was discovered to be one of the most commonly used materials in solar cells in 2014, and the researcher compared the cell Layered solar panels ITO/PEDOT:PSS/P3HT:PCBM/AL, with other cells of the same composition and by adding other materials, it was discovered that the efficiency of the first is 3.07%, while the efficiency of the other is about 1.87% (25). In 2015, the researcher Abdulla.Hussen created a solar cell using gold nanoparticles that had an efficiency of up to 3.7% and were layered . ITO:PEDOT:PSS: AuNps:P3HT:PCPM/AL

In the same year, Furkan.K of the University of Technology, Baghdad, investigated the effect of lasers on the efficiency of a solar cell with the composition ITO/PEDOT:PSS/Polymini + TiO₂ + Al₂O₃ using the spin coating method, and it had a 3.7% efficiency (26). Fatima Hameed, a researcher, built a solar cell in 2016 with the following composition: ITO/PEDOT:PSS/P3HT:Orange G/AL and different doping ratios for the dye used, with the best result when doping 5% (27). a ternary system in 2017 that consists With a mass ratio of 1:1, it is possible to achieve a high PCE of 9.0% by combining two morphologically compatible polymers with distinct chemical structures. Definitely more than triple. We attribute this to the system's high conformational compatibility, equilibrium electron and hole mobility, and reduced recombination. In 2018, ternary organic solar cells

were created using a donor polymer PBT1-C, an integrated-ring amorphous electron acceptor ITIC-2Cl, and a two-channel amorphous indene-C60 fullerene derivative (ICBA). It was discovered that Ekpa can disrupt the interactions of ITIC-2Cl crystal molecules in ternary syntheses, resulting in a more uniform conformation. As a result of incorporating 20% EkPA into the PBT1-C:ITIC-2Cl blend, efficient charge dissociation, negligible molecular recombination, and balanced charge-carrier transitions are possible. With a high fill factor (FF) of 76.8%, an impressive power conversion efficiency (PCE) of 13.4% was achieved, representing one of the highest PCEs reported to date for organic solar cells (28).

In 2020, researcher Haitham Ahmed and colleagues created a high-efficiency polymeric solar cell of type P,n based on carbon nanotubes (29). Tao Liu et al. improved the efficiency of an organic solar cell to 16% in 2021 by incorporating a small amount of BN-T, an N-type polymer acceptor, which results in enhanced exciton formation and charge transfer (30).

Conclusion.

Organic solar cells (OSCs) have significant advantages in terms of achieving low production costs while maintaining high efficiency. OSCs provide advantages such as the ability to tune chemical properties, light weight, and ease of fabrication. Although solar cells based on inorganic molecules have demonstrated higher energy conversion efficiency and environmental stability, high performance OSCs can be obtained by using highly absorbent materials. Polymers are commonly used as absorbent layers to induce light absorption efficiency and device performance. To achieve highly effective OSC, new polymers with a narrow band gap and appropriate energy level arrangement must be designed.

REFRAINS

- 1.** Yang Tong, Zuo Xiao, Progress of the key materials for organic solar cells *ScienceChina-Chemistry* · March 2020.DOI: 10.1007/s11426-020-9726-0,P,1-7
- 2.** Liu Q, Jiang Y, Jin K, Qin J, Xu J, Li W, Xiong J, Liu J, Xiao Z, SunK, Yang S, Zhang X, Ding L. 18% Efficiency organic solar cells,*Sci Bull*, 2020, 65: 272–275.
- 3.** Marks, R.N.; Halls, J.J.M.; Bradley, D.D.C.; Friend, R.H.; Holmes, A.B. The photovoltaic response in poly(p-phenylene vinylene) thin-film devices. *J. Phys. Condens. Matter* 1994, 6, 1379–1394.
- 4.** Tang, C.W. ,Two-layer organic photovoltaic cell. *Appl. Phys. Lett.* 1986, 48, 183–185.
- 5.** Meng L, Zhang Y, Wan X, Li C, Zhang X, Wang Y, Ke X, Xiao Z, Ding L, Xia R, Yip HL, Cao Y, Organic and solution-processed tandem solar cells with 17.3%efficiency Chen Y. *Science*, 2018, 361: 1094–1098.
- 6.** Yu, G.; Gao, J.; Hummelen, J.C.; Wudl, F.; Heeger, A.J. Polymer photovoltaic cells: Enhanced efficiencies via a network of internal donor-acceptor heterojunctions. *Science* 1995, 270, 1789.
- 7.** Zhu, L.; Zhong, W.; Qiu, C.; Lyu, B.; Zhou, Z.; Zhang, M.; Song, J.; Xu, J.; Wang,J.; Ali, J.; et al. Aggregation-induced multilength scaled morphology enabling 11.76%efficiency in all-polymer solar cells using printing fabrication. *Adv. Mater.* 2019, 31, 1902899.
- 8.** Zhao, R.; Wang, N.; Yu, Y.; Liu, J. Organoboron polymer for 10% efficiency all- polymer solar cells. *Chem. Mater.* 2020, 32,1308–1314.
- 9.** Zhang, S.; Qin, Y.; Zhu, J.; Hou, J. Over 14% efficiency in polymer solar cells enabled by a chlorinated polymer donor. *Adv. Mater.* 2018, 30, 1800868.
- 10.** Ma, R.; Liu, T.; Luo, Z.; Guo, Q.; Xiao, Y.; Chen, Y.; Li, X.; Luo, S.; Lu, X.; Zhang, M.; et al. Improving open-circuit voltage by a chlorinated polymer donor endows binary organic solar cells efficiencies over 17%. *Sci. China Chem.* 2020, 63, 325–330.
- 11.** Kesinro, R. O., Boyo, A. O., Akinyemi, M. L. & Mola, G. T. (2019). Fabrication of P3HT: PCBM bulk heterojunction organic solar cell, *IOP Conf. Series: Earth and Environmental Science*, 331: 012028.
- 12.** Zheng, Y., Wang, G., Huang, D., Kong, J., Goh, T., Huang, W., Yu, J., & Taylor, A. D. (2018). Binary solvent additives treatment boosts the efficiency of PTB7: PCBM polymer solar cells toover 9.5%, *Solar RRL*, 2: 1700144.
- 13.** Abodunrin, T. J., Boyo, A. O., Usikalu, M. R. & Kesinro, O. (2018). Spectral responses of

B.vulgaris dye-sensitized solar cells to.

14. X. Du, T. Heumueller, W. Gruber, A. Classen, T. Unruh, N. Li, C. J. Brabec, Efficient Polymer Solar Cells Based on Non-fullerene Acceptors with Potential Device Lifetime Approaching 10 Years *Joule* 2019, 3, 215.
15. Q. Burlingame, X. Huang, X. Liu, C. Jeong, C. Coburn, S. R. Forrest, Intrinsically stable organic solar cells under high-intensity illumination, *Nature* 2019, 573, 394.
16. J. Schaffer, C.M. Palumbiny, M. A. Niedermeier, C. Jendrzewski, G. Santoro, S.V. Roth, P. Muller-Buschbaum, A direct evidence of morphological degradation on a nanometer scale in polymer solar cells, *Adv. Mater.* 2013, 25, 6760
17. K. Feron, T. J. Nagle, L. J. Rozanski, B. B. Gong, C. J. Fell, Sol. Spatially resolved photocurrent measurements of organic solar cells: tracking water ingress at edges and pinholes, *Energy Mater. Sol. Cells* 2013, 109, 169.
18. Achilleas S*, Giannis P., Stelios A. Choulis, High-Performance Inverted Organic Photovoltaics Without Hole-Selective Contact, *ACS Appl. Mater. Interfaces* 2015, 7, 618.
19. A. Agresti, S. Pescetelli, Y. Busby, T. Aernouts, *IEEE Trans. Electron Devices* 2019, 66, 678.
20. 19-C. Wang, S. Ni, S. Braun, M. Fahlman, X. Liu, Effects of water vapor and oxygen on non-fullerene small molecule acceptors, *J. Mater. Chem. C* 2019, 7, 879.
21. Z. Zheng, H. Yao, L. Ye, Y. Xu, S. Zhang, J. Hou, Efficient organic solar cells with superior stability based on PM6:BTP-eC9 blend and AZO/Al cathode *Mater. Today*, 2020, 35, 115;
22. S. Günes, H. Neugebauer, and N. S. Sariciftci, "Conjugated polymer-based organic solar cells," *Chem. Rev.*, pp. 1324–1338, (2007).
23. M. K.R. and Richards B.S., "Increased mc-Si module Efficiency Using Organic Dyes: a Ray-Tracing Study", The Australian National University, Canberra, Australia, (2007).
24. Ri. B.S. and Mclutosh K.R., "Enhancing the efficiency of production CdS /CdTe PV at short wavelengths via luminance down-shifting", Center for Sustainable Energy System, Canberra, ACTo200, Australia, (2007).
25. D.Zhen, C. Zhen and W.lu zhao, " High efficiency bulk hetrojunction organic solar cells by using high conductivity modified PEDOT:PSS as a buffer layers ", 8,5,(2012)
26. W. Kim, J. Kyu Kim, and Y. Lim, Hyeok Park, "Tungsten oxide/PEDOT:PSS hybrid cascade hole extraction layer for polymer solar cells with enhanced long-term stability and power conversion efficiency," *Sol. Energy Mater. Sol. Cells*, vol. 122, pp. 24–30, 2014.
27. A .Abbas, Hussein ,Phs, "Fabrication of an organic solar cells based on a layers of P3HT :Fullerene blends and optimize its operation under different conditions "(2014). 27-Fatima.h. The effect of Orange G on the optical and electrical properties of PH3/PEDOT:PSS. MS.2016.
28. Jiangquan Mai, Haipeng Lu, Tsz-Ki Lau, Shih-Hao Peng Chain-Shu Hsu, Wenqiang Hua, Ni Zhao, Xudong Xiao and Xinhui Lu .(High efficiency ternary organic solar cell with morphology-compatible polymers, *Journal of Materials Chemistry A*, 3,2017.
29. Bingbing , Bi , Mohammad Afsar Uddin ,Yuxiang Li ,Fan Yang ,-Yuanpeng Xie- Morphology Feng Liu ,Weiwei Li ,Han Young Woo ,Xiaotao Hao ,Yunhao Cai ,Fan Control Enables Efficient Ternary Organic Solar Cells. Pengqing 2018 .
30. Wenyan Su, Qunping Fan*, Ishita Jalan, Yufei Wang, Wenhong Peng, Tao Guo, Weiguo Zhu, Donghong Yu, Lintao Hou, Ellen Moons, Nonconjugated Terpolymer Acceptors with Two Different Fused-Ring Electron-Deficient Building Blocks for Efficient All-Polymer Solar Cells, *ACS Appl. Mater. Interfaces* 2021, 13, 5, 6442–6449, 26, 2021